SPHERE Lamp Head Black/Clear

Technical Data

Voltage	230V~
Power	60W
IP Class	IP44


RoHS ⊕ ♦ C € Z


107119

2. There of Q waterproof stopper in each screw gland, remove ed. For not used screw gland, the waterp pof stopper please keer ne waterpro® Tropper there. 3. Screw grand B and C ard PG13.5, cable diameter should be 6-12 mm. **©** 13 Markslojd AB ttt Gränevagen 5 S-511 62 Skene

> Sweden www.markslojd.com

It is suggested that this upper part be out for 16mm, but actually installation should be done according to the real situation.



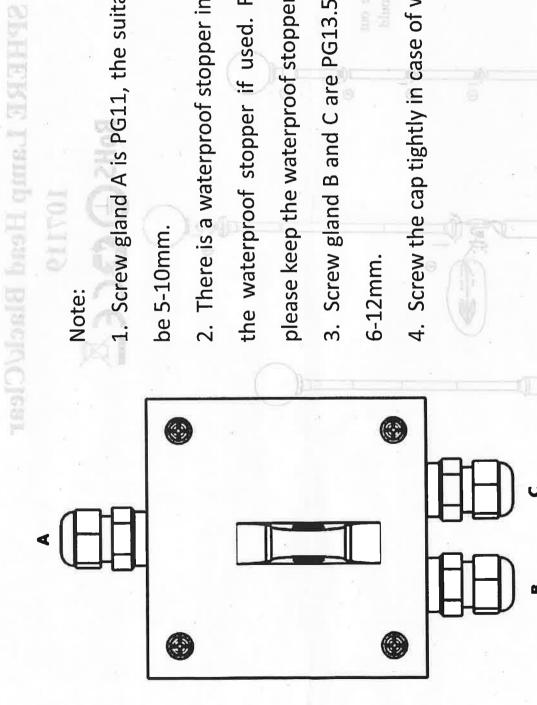

1. Screw gland A is PG11, the suitable cable diameter should

be 5-10mm.

2. There is a waterproof stopper in each screw gland, remove the waterproof stopper if used. For not used screw gland, please keep the waterproof stopper there. 3. Screw gland B and C are PG13.5, cable diameter should be 6-12mm.

4. Screw the cap tightly in case of water leakage.

Grahevagen 5 S-511 62 Skene